


MX212

TRIMLESS

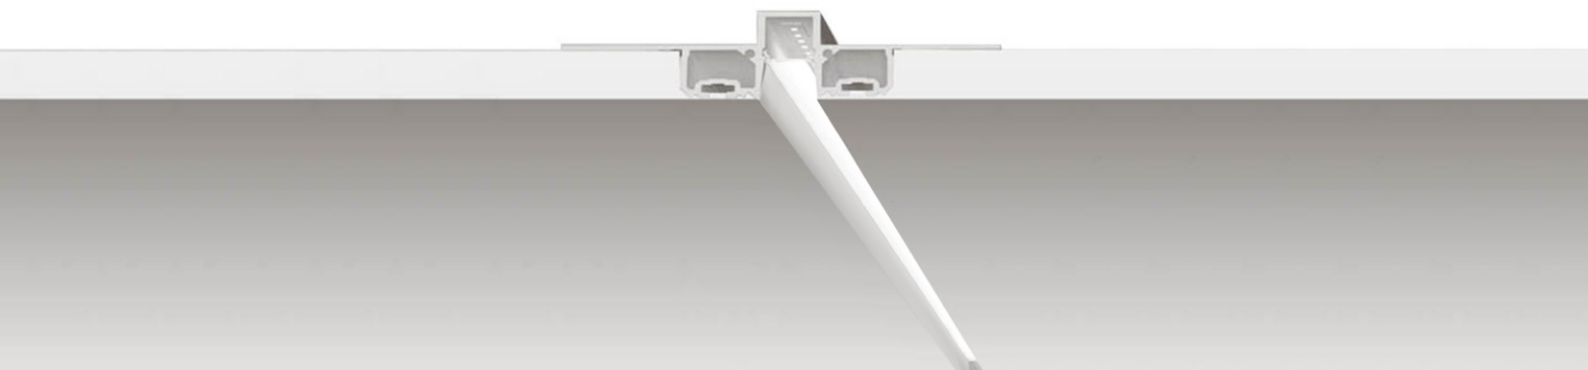


MONOLINE-MX212

A trimless recess mounted linear LED luminaire manufactured from extruded aluminium and finished in matt white with an opal diffuser. Designed for installation in single layer 12.5mm Gypsum plasterboard.

Each PCB module has an on-board Integrated Controller (IC), for precise constant current control, whilst a Schottky diode provides reverse polarity protection. A range of LED options are available with a choice of Nichia, Osram or Lumileds LED, with colour temperatures from 2000K - 6500K and power outputs from 4.8W/m - 24.0W/m.

TECHNICAL

Housing:	Anodised Aluminium
Diffuser:	Polycarbonate UV Stabilised
Lengths:	3000mm
Max LED Wattage:	24w/m
Max PCB Width:	12mm
Hot-Spot Free:	≥112 LED/m
Weight:	1.013kg/m
IP Rating:	IP40

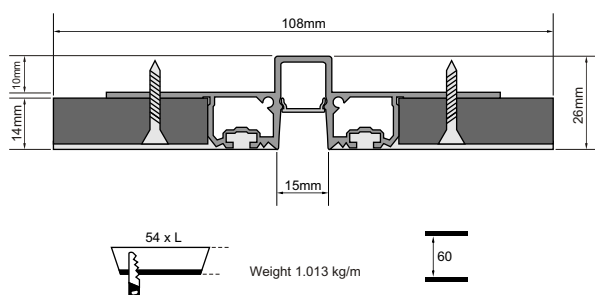


FINISH




CATALOGUE NO.

MX212-W-3-OC 3000mm matt white with opal diffuser


ACCESSORIES



MX212-KEY Installation key



MX212-LC 1 connector every 3 metres



MX212-EC Aluminium end cap