


X024

RECESSED

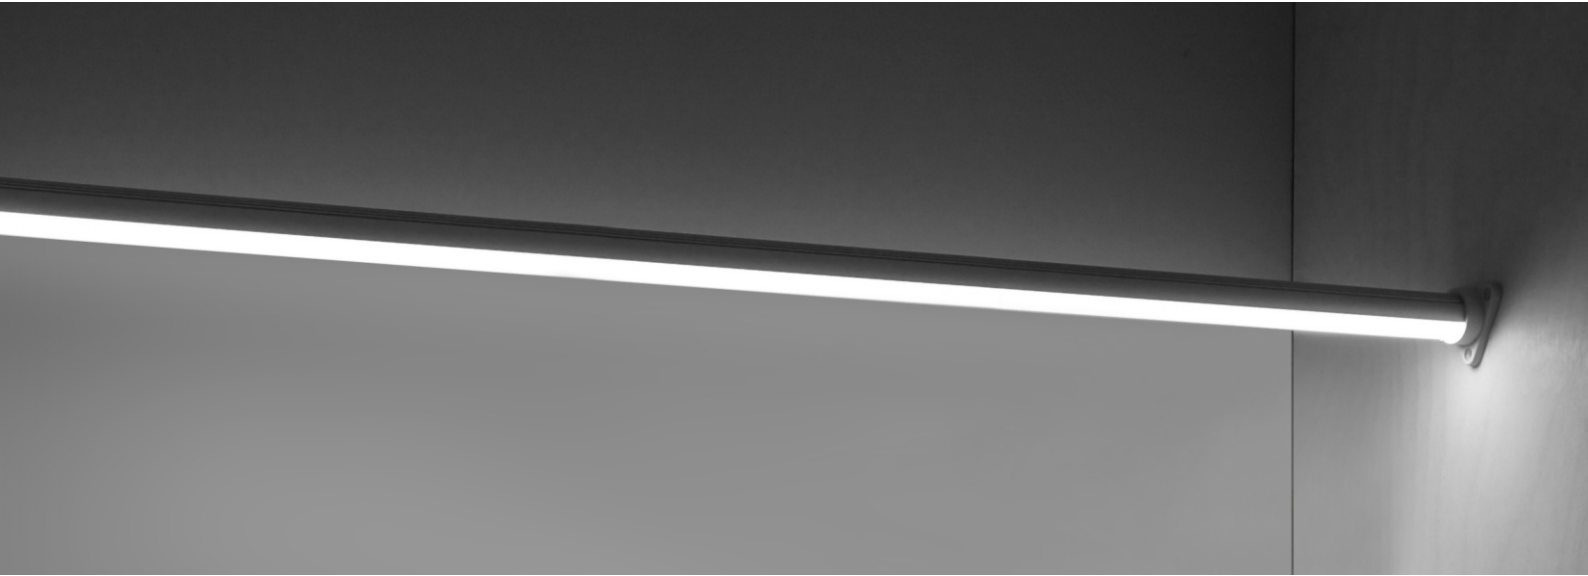

MONOLINE-X024

A miniature linear LED luminaire manufactured from extruded anodised aluminium with an opal snap-in diffuser. Designed as an illuminated hanging rail, pendant luminaire or bracket mounted wall light, when used with the appropriate mounting accessories.


MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

TECHNICAL

Housing:	Anodised Aluminium
Diffuser:	Polycarbonate UV Stabilised
Lengths:	2000mm & 3000mm
Max LED Wattage:	24w/m
Max PCB Width:	12mm
Hot-Spot Free:	≥112 LED/m
Weight:	0.60kg/m
IP Rating:	IP40




FINISH



CATALOGUE NO.

X024-2-OC	2000mm anodised silver with opal diffuser
X024-3-OC	3000mm anodised silver with opal diffuser



ACCESSORIES

