


XR25

RECESSED

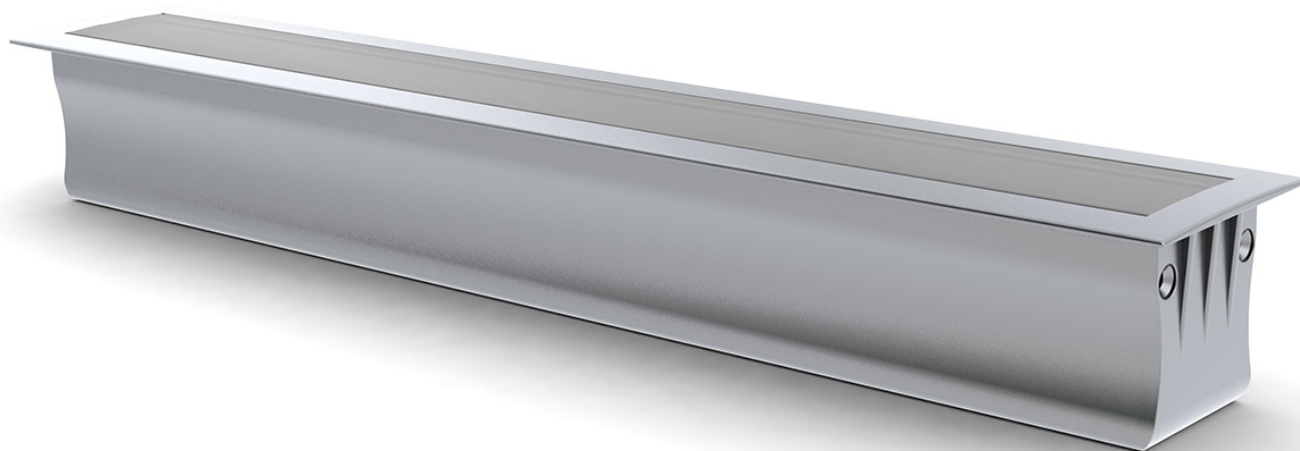


MONOLINE-XR25

A recess mounted extruded aluminium profile manufactured from high-density aluminium, with a highly durable anodised finish with an opal diffusers.

MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

TECHNICAL

Housing:	Anodised Aluminium
Diffuser:	Polycarbonate UV Stabilised
Lengths:	2000mm
Max LED Wattage:	24w/m
Max PCB Width:	12mm
Hot-Spot Free:	≥112 LED/m
Weight:	0.46kg/m
IP Rating:	IP40



FINISH



CATALOGUE NO.

XR25-2-OC

2000mm anodised silver with opal diffuser

ACCESSORIES



┐ XR25-SMB Sprung steel bracket



┐ XR25-EC Aluminium end cap