


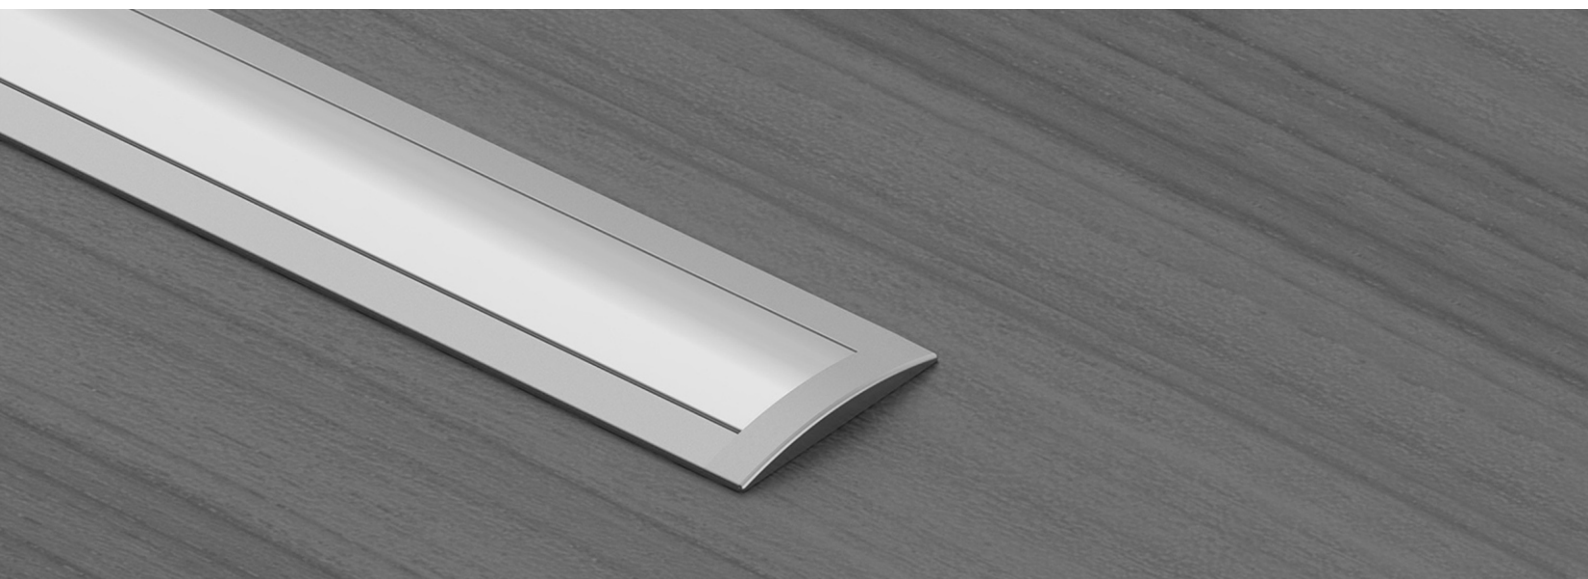


MONOLINE-XR7

A recess mounted extruded aluminium profile manufactured from high-density aluminium, with a highly durable anodised finish. Available with clear cover, frosted or opal diffusers.

MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

TECHNICAL

Housing:	Anodised Aluminium
Diffuser:	Polycarbonate UV Stabilised
Lengths:	2000mm
Max LED Wattage:	19.2w/m
Max PCB Width:	12mm
Hot-Spot Free:	≥112 LED/m
Weight:	0.14kg/m
IP Rating:	IP40



FINISH



CATALOGUE NO.

XR7-2-CC	2000mm anodised silver with clear cover
XR7-2-FC	2000mm anodised silver with frosted diffuser
XR7-2-OC	2000mm anodised silver with opal diffuser

ACCESSORIES



▮ **XR7-EC** Aluminium end cap



▮ **XR7-ECH** Aluminium end cap with hole