


# XS20

SURFACE

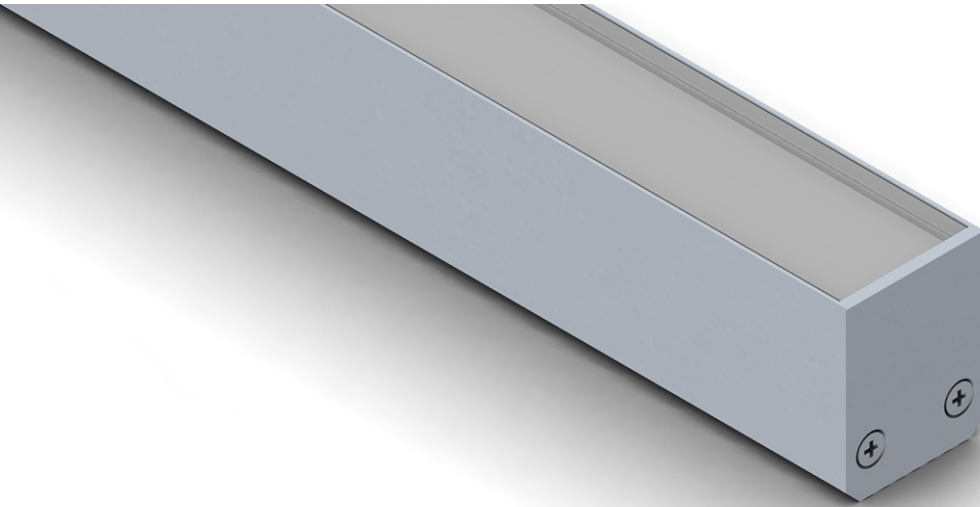


## MONOLINE-XS20

A surface mounted extruded aluminium profile manufactured from high-density aluminium, with a highly durable anodised finish and opal diffuser.


MONOFLEX LED available in static white, tunable white and dynamic colour changing, with a choice of Nichia, Osram or Lumileds LED.

## TECHNICAL

|                         |                             |
|-------------------------|-----------------------------|
| <b>Housing:</b>         | Anodised Aluminium          |
| <b>Diffuser:</b>        | Polycarbonate UV Stabilised |
| <b>Lengths:</b>         | 2000mm & 3000mm             |
| <b>Max LED Wattage:</b> | 24w/m                       |
| <b>Max PCB Width:</b>   | 12mm                        |
| <b>Hot-Spot Free:</b>   | ≥112 LED/m                  |
| <b>Weight:</b>          | 0.45kg/m                    |
| <b>IP Rating:</b>       | IP40                        |




## FINISH




## CATALOGUE NO.

|                  |                                           |
|------------------|-------------------------------------------|
| <b>XS20-2-OC</b> | 2000mm anodised silver with opal diffuser |
| <b>XS20-3-OC</b> | 3000mm anodised silver with opal diffuser |

## ACCESSORIES



XS20-LC Connector every 3 metres



XS20-LC90 90° connector every corner



XS20-EC Aluminium End Cap